



Polymer additives 聚合物添加劑

Antioxidant 抗氧化劑

Product Name	Application
K-NOX[®] 230	Polyolefin(Pipes), Engineering plastics
K-NOX[®] 014	Polyolefin(film, fiber, sheet)
K-NOX[®] 168	Processing stabilizer for general purpose
K-NOX[®] 626	Processing stabilizer for general purpose
K-NOX[®] 412s	Polyolefin, Styrene
K-NOX[®] 565	Polyolefin
K-NOX[®] L57	PU, lubricating oils, Elastomer
K-NOX[®] 1520	Most elastomer, Polybutadiene rubber
K-NOX[®] 1726	Copolymer of Styrene, Butadiene and Isoprene



Polymer additives 聚合物添加劑

Clarifying Agent 透明劑

Product Name	Application
K-CLEAR® 40	Polyolefin
K-CLEAR® 34	Polyolefin
K-CLEAR® 34i	Polyolefin
K-CLEAR® 34N1	Polyolefin



UV Absorbers 紫外線吸收劑



Oxybenzone

Octocrylene

Avobenzone

K-SORB S

K-SORB 1064



Curing Agent 交聯劑

K-Cure 339

(Zinc diacrylate)

K-Cure 439

(Zinc dimethacrylate)





Reducing Agent 還原劑

K-Mars 110

(Dimethylamine Borane)

K-Mars 120

(Morpholine Borane)






TPU *Thermoplastic polyurethane* 熱塑性彈性體

Kuotane TPU

Polyester type & polyether type

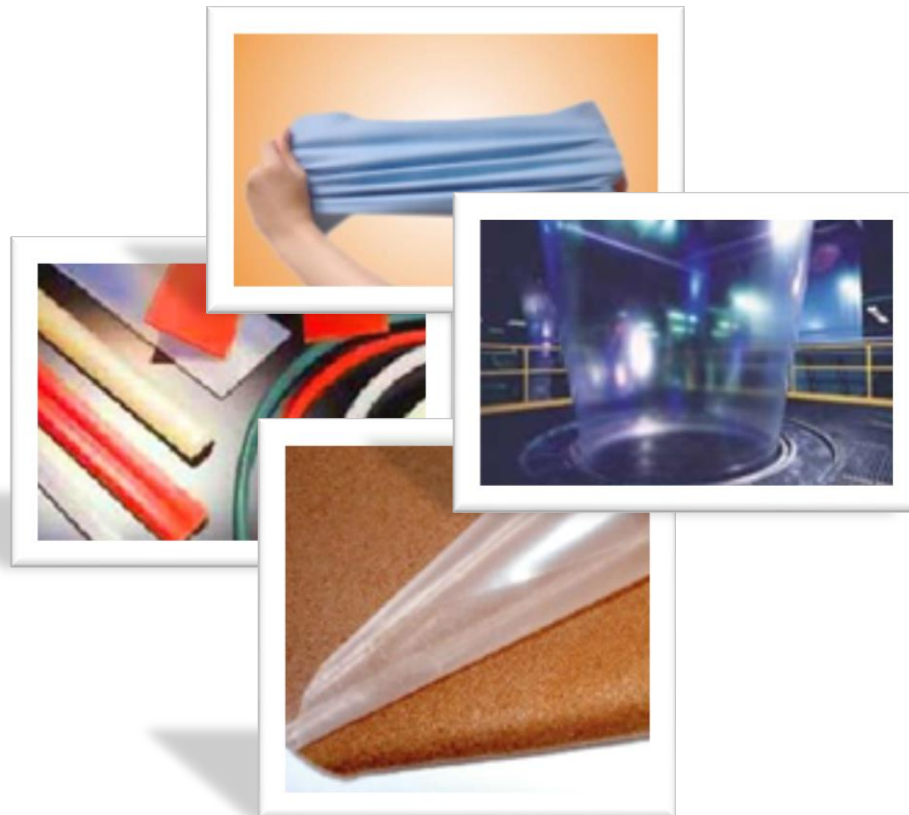




ETPU *Thermoplastic polyurethane* 熱塑性彈性體

ETPU is a pre-foamed TPU which could be molded into desired shape or form by our patented microwave technology. The processing time could be as short as 30 seconds. It could also be adhered to compatible materials without using primer or adhesives. This unique green technology could help reduce processing cost and labor.

ETPU comes in various colors

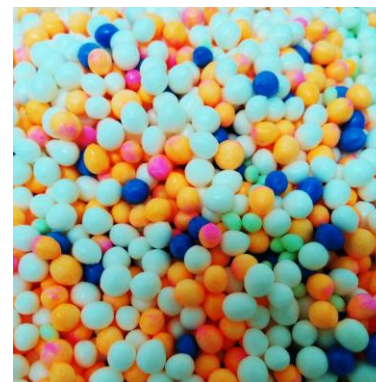

Microwave for 30 seconds



Shoe sole made from ETPU, with a specific gravity around 0.25 g/cm³



ELASTOPLAS[®] 熱塑性彈性體

is a high performance elastomer which combines the look and feel of vulcanized rubber and also the processing ease of thermoplastics





ETPV

熱塑性彈性體

ETPV is our Elastoplas[®] designed for the foaming application. It offers properties such as light weight and high rebound which are far superior to that of EVA. Yet, it can be processed just like ordinary EVA.



density = 0.12~0.14

rebound > 65